



StarX

HIGH PERFORMANCE PAD

pad properties

the highly developed **StarX** pad possess the following outstanding features:

antistatic behaviour – outstanding antistatic behavior allows for a perfect ink transfer without practically any ink splashes on the edges or ink remaining on the pad.

resistance – unparalleled mechanical resistance enables longer pad lifespans, even when printing over sharp edges of the printed part.

no swelling – swelling on the pad surface from solvents, ink and repeated pad to part compressions are eliminated.

user friendly – **StarX** pads require only a few seconds to be activated by briefly cleaning the surface of the pad with thinner. These pads should only be stored shaded from direct sunlight and not in contact with other objects.

pad types

The **StarX** high performance pads can be purchased in varying degrees of hardness. On delivery their hardness tolerance is +\-2 Shore-00.

Shore*	remarks
62 Shore-00	very hard, e.g. for textured surfaces
54 Shore-00	normal hardness – most often used hardness
44 Shore-00	soft – especially good for rounded or curved components
39 Shore-00	very soft – for delicate and breakable components

The pad hardness must be stated on ordering the pad.

e.g.: T0142-64

T = pad

0142 = pad number


-64 = pad hardness

e.g.: 1497-44


T = pad

1497 = pad number

-44 = pad hardness

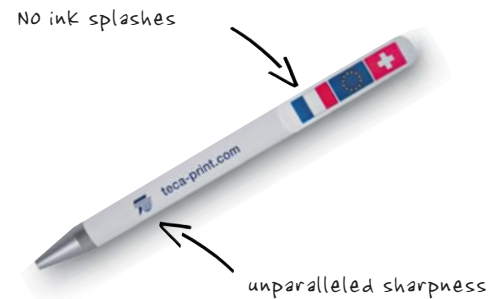

despite the sharp edge on the part:
X 100' 000 prints and more

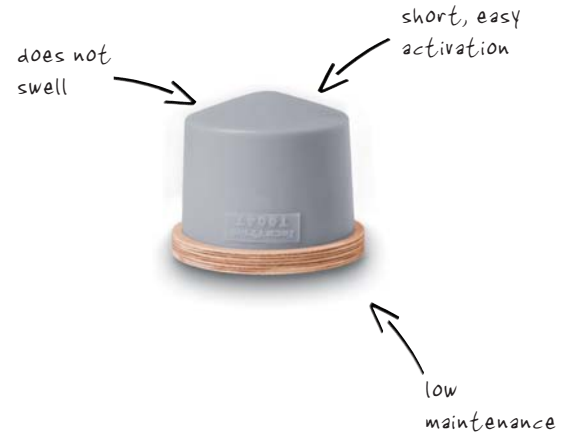

<p>Group 1: ROUND pads for round print images</p>	<p>Group 2: RING SHAPED pads for ring shaped images</p>
<p>Group 3: SQUARE pads for square shaped images</p>	<p>Group 4: RECTANGULAR pads for rectangular shaped images</p>
<p>Group 5: special pads pads for problematic prints</p>	<p>rotary printing pads</p>
	<p>pad holders</p>



Order our pad catalog for more informations about Teca-Print pads, as a **paperback version** or **CD-Rom**.
Or download the pad catalog (pdf-Format) from our website:

www.padprinting.biz
www.tampographie.biz
www.tampondruck.biz
www.teca-print.com

Teca-Print

Teca-Print AG

Tel. +41 (0)52 645 2000

Tel. +41 (0)52 FON TECA

Postfach

Fax +41 (0)52 645 2102

Bohlstrasse 17

info@teca-print.com

CH-8240 Thayngen

teca-print.com